




QQ-7601A 三节精密静音滚珠重型滑轨 3-Fold Precise & silent heavy duty ball bearing slide

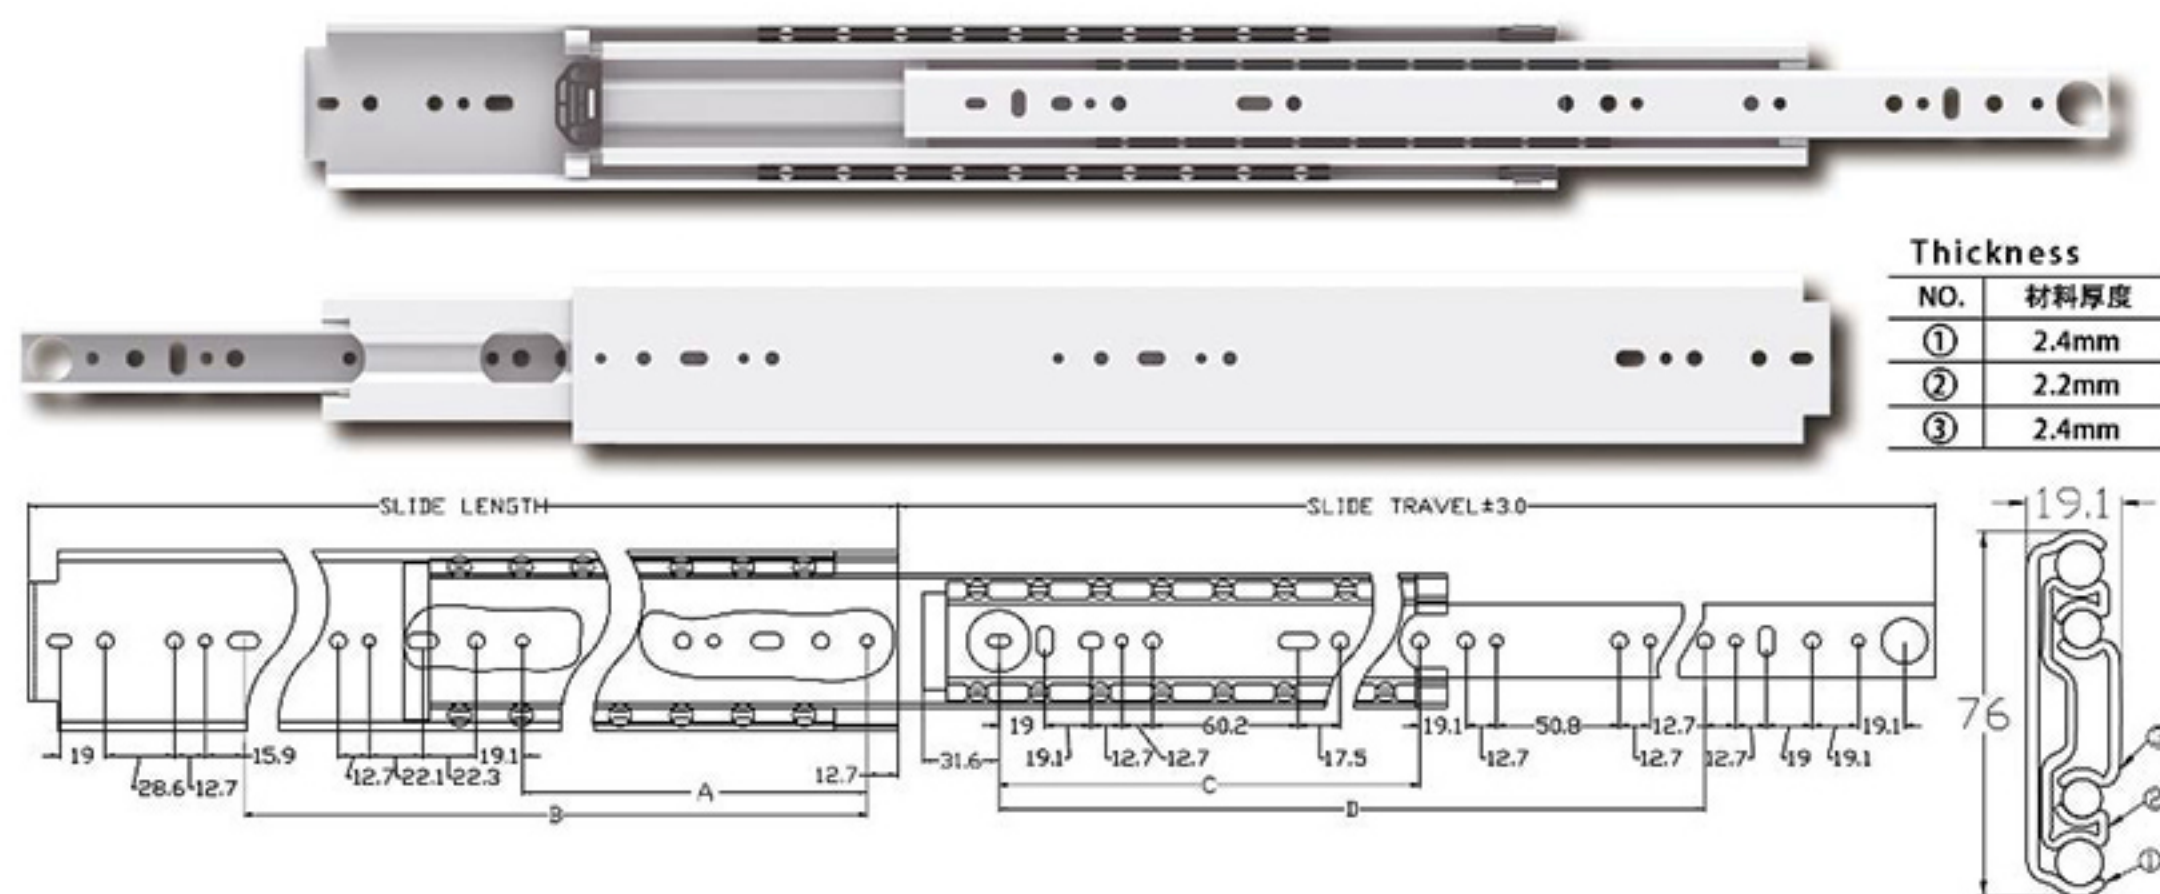


Thickness	
NO.	材料厚度
①	2.4mm
②	2.2mm
③	2.4mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	D mm	Weight Capacity lbs/kg	Weight g/set	Carton set
10"	254	240.2		152.4		103.1	577/262	2400	5
12"	304.8	291		203.2		153.9	566/257	2880	5
14"	355.6	341.8		254		204.7	555/252	3360	5
16"	381	392.6		304.8		255.5	544/247	3840	5
18"	457.2	443.4		355.6		306.3	533/242	4320	5
20"	508	494.2		406.4	211	357.1	522/237	4800	4
22"	558.8	545	203.2	457.2	261.8	407.9	511/232	5280	4
24"	609.6	595.8	254	508	312.6	458.7	500/227	5760	4
26"	660.4	646.6	333.4	558.8	363.4	509.5	489/222	6240	4
28"	711.2	697.4	333.4	606.6	414.2	560.3	478/217	6720	3

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 回弹定位器, 不可分离, 防止抽屉弹出机构。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**500磅/227kgs (24" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full exctension
- **Features:**100% Exetension, spring-back positioner, inseparble, mechanism to prevent the drawer pops out
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium.
- **Weight Capacity:**500lbs/227kgs(for 24")
- **Material:**cold-rolled steel, stainless steel



QQ-7602A 三节精密静音滚珠重型滑轨 3-Fold Precise & silent heavy duty ball bearing slide

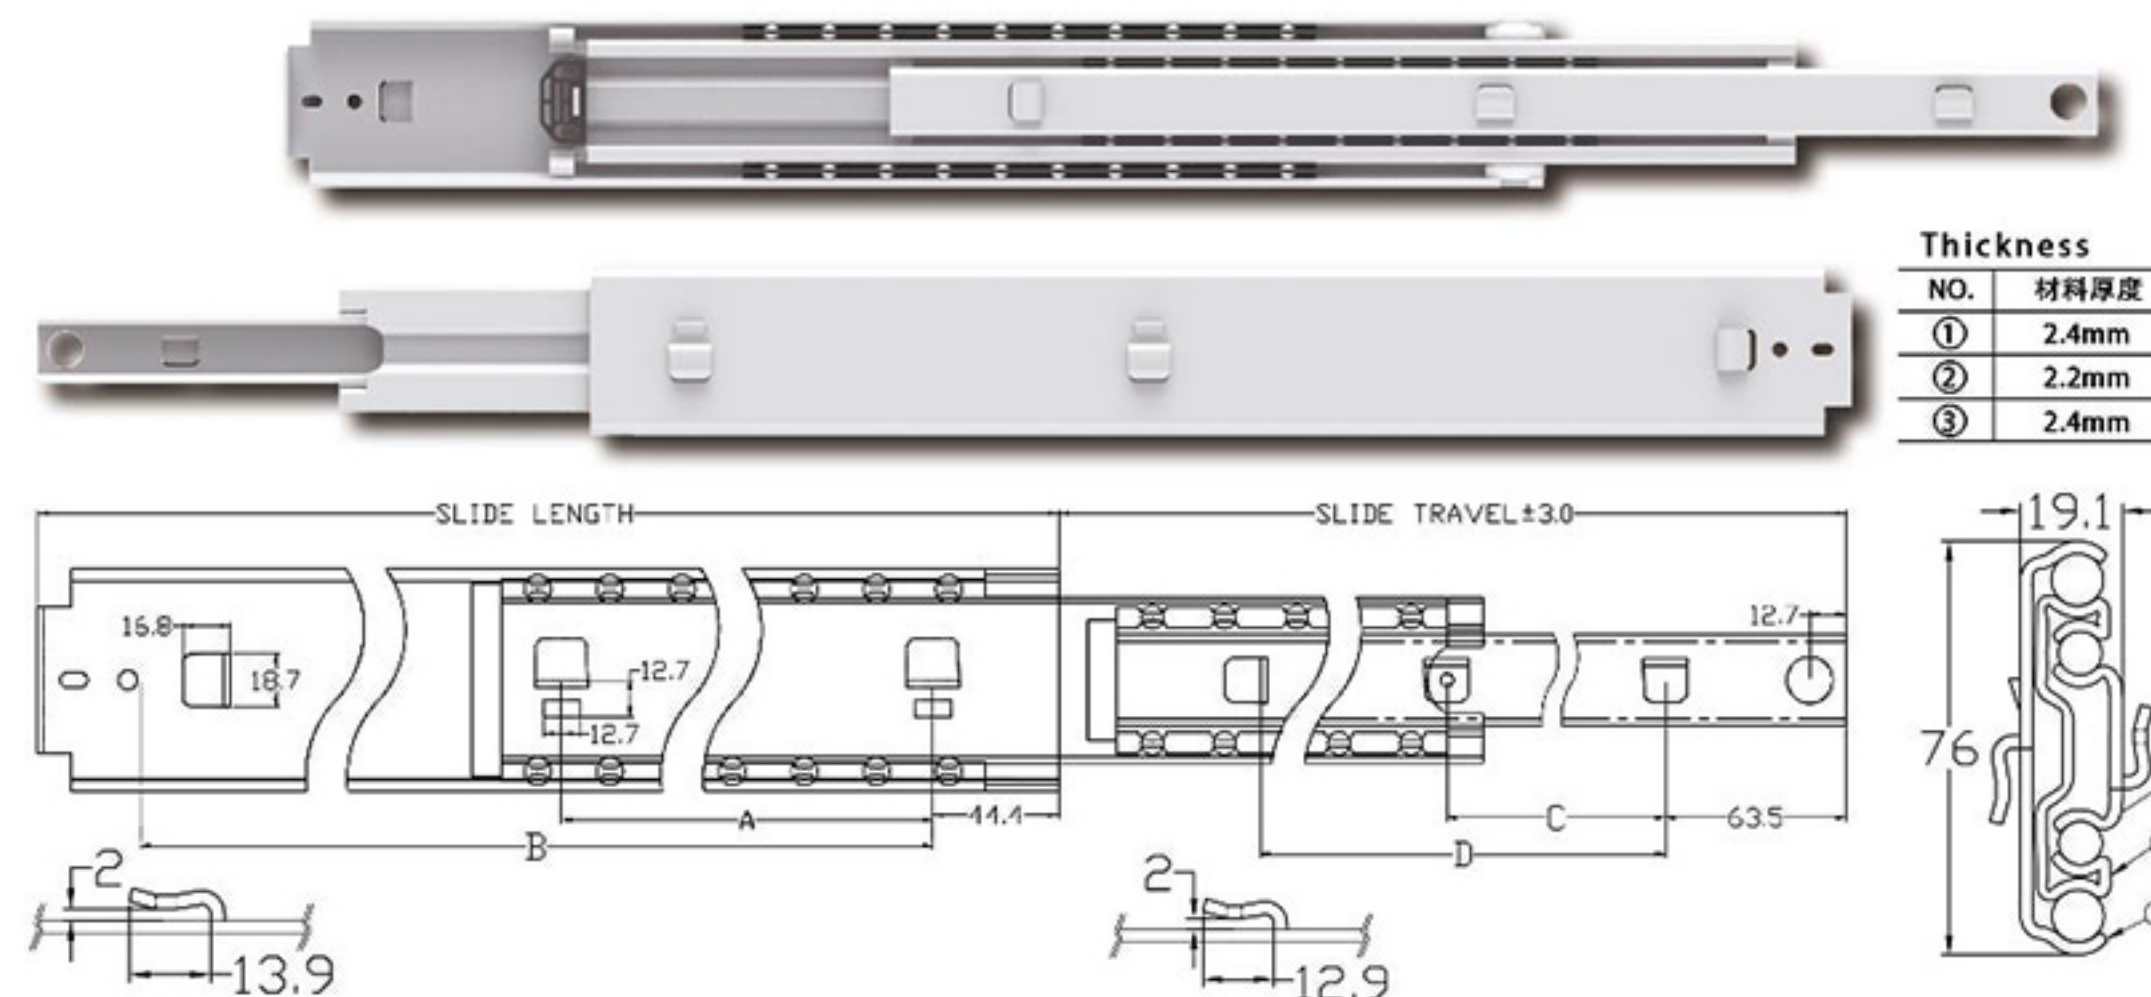


Thickness	
NO.	材料厚度
①	2.4mm
②	2.2mm
③	2.4mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	D mm	Weight Capacity lbs/kg	Weight g/set	Carton set
10"	254	240.2		152.4		101.6	577/262	2400	5
12"	304.8	291		203.2		152.4	566/257	2880	5
14"	355.6	341.8		254		203.2	555/252	3360	5
16"	381	392.6		304.8		254	544/247	3840	5
18"	457.2	443.8		355.6		304.8	533/242	4320	5
20"	508	492.2	203.2	406.4		355.6	522/237	4800	4
22"	558.8	545	203.2	457.2	203.2	406.4	511/232	5280	4
24"	609.6	595.8	254	508	203.2	457.2	500/227	5760	4
26"	660.4	646.6	254	558.8	254	508	489/222	6240	4
28"	711.2	697.4	304.8	609.6	254	558.8	478/217	6720	3

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 简便的挂插式安装, 不可分离, 防止抽屉弹出机构。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**500磅/227kgs (24" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full exetension
- **Features:**100% Exetension, bayonet mounting-easy and quick installation and removal, mechanism to prevent the drawer pops put.
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium.
- **Weight Capacity:**500lbs/227kgs(for 24")
- **Material:**cold-rolled steel, stainless steel



QQ-7603A 三节精密静音滚珠重型滑轨
3-Fold Precise & silent heavy duty ball bearing slide

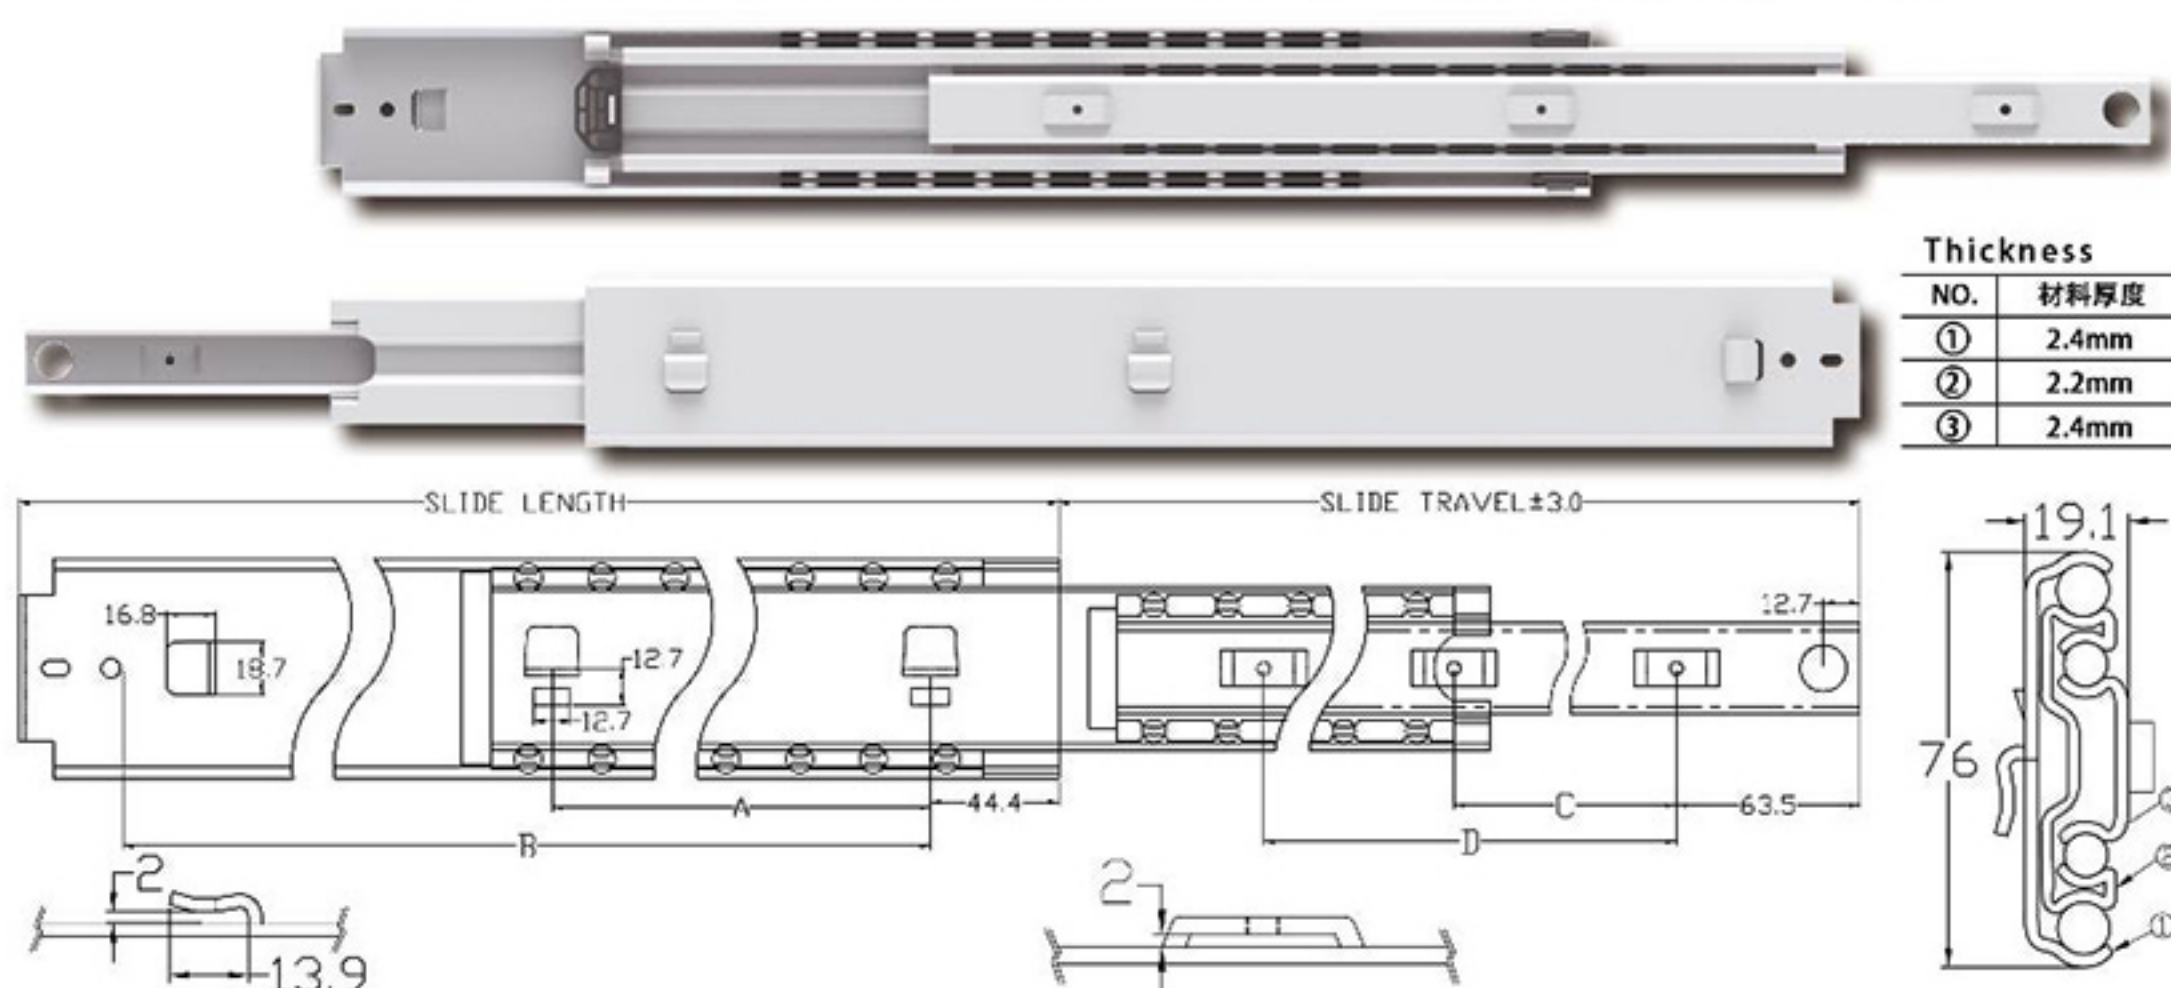

NO.	材料厚度
①	2.4mm
②	2.2mm
③	2.4mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	D mm	Weight Capacity lbs/kg	Weight g/set	Carton set
10"	254	240.2		152.4		101.6	577/262	2400	5
12"	304.8	291		203.2		152.4	566/257	2880	5
14"	355.6	341.8		254		203.2	555/252	3360	5
16"	381	392.6		304.8		254	544/247	3840	5
18"	457.2	443.4		355.6		304.8	533/242	4320	5
20"	508	494.2	203.2	406.4		355.6	522/237	4800	4
22"	558.8	545	203.2	457.2	203.2	406.4	511/232	5280	4
24"	609.6	595.8	254	508	203.2	457.2	500/227	5760	4
26"	660.4	646.6	254	558.8	254	508	489/222	6240	4
28"	711.2	697.4	304.8	606.6	254	558.8	478/217	6720	3

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运输车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 简便的挂插式安装, 不可分离, 防止抽屉弹出机构。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**500磅/227kgs (24" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, server cabinet or any applications requiring full extension
- **Features:**100% Extension, bayonet mounting-easy and quick installation and removal, inseparable, mechanism to prevent the drawer pops put
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**500lbs/227kgs(for 24")
- **Material:**cold-rolled steel, stainless steel



精密滚珠滑轨制造企业、真正的滑轨制造专家
Real Expert and Manufacturer for Precise Ball Bearing Slide
承载 (weight capacity):400lbs/182kgs-28"滑轨。




71系列
三节精密滚珠滑轨

3-FOLD PRECISE & SILENT HEAVY DUTY BALL BEARING SLIDE
Http: //www.xingyuancn.com E-mail:ykxingyuan@163.net



QQ-7101A 三节精密静音滚珠重型滑轨

3-Fold Precise & silent heavy duty ball bearing slide

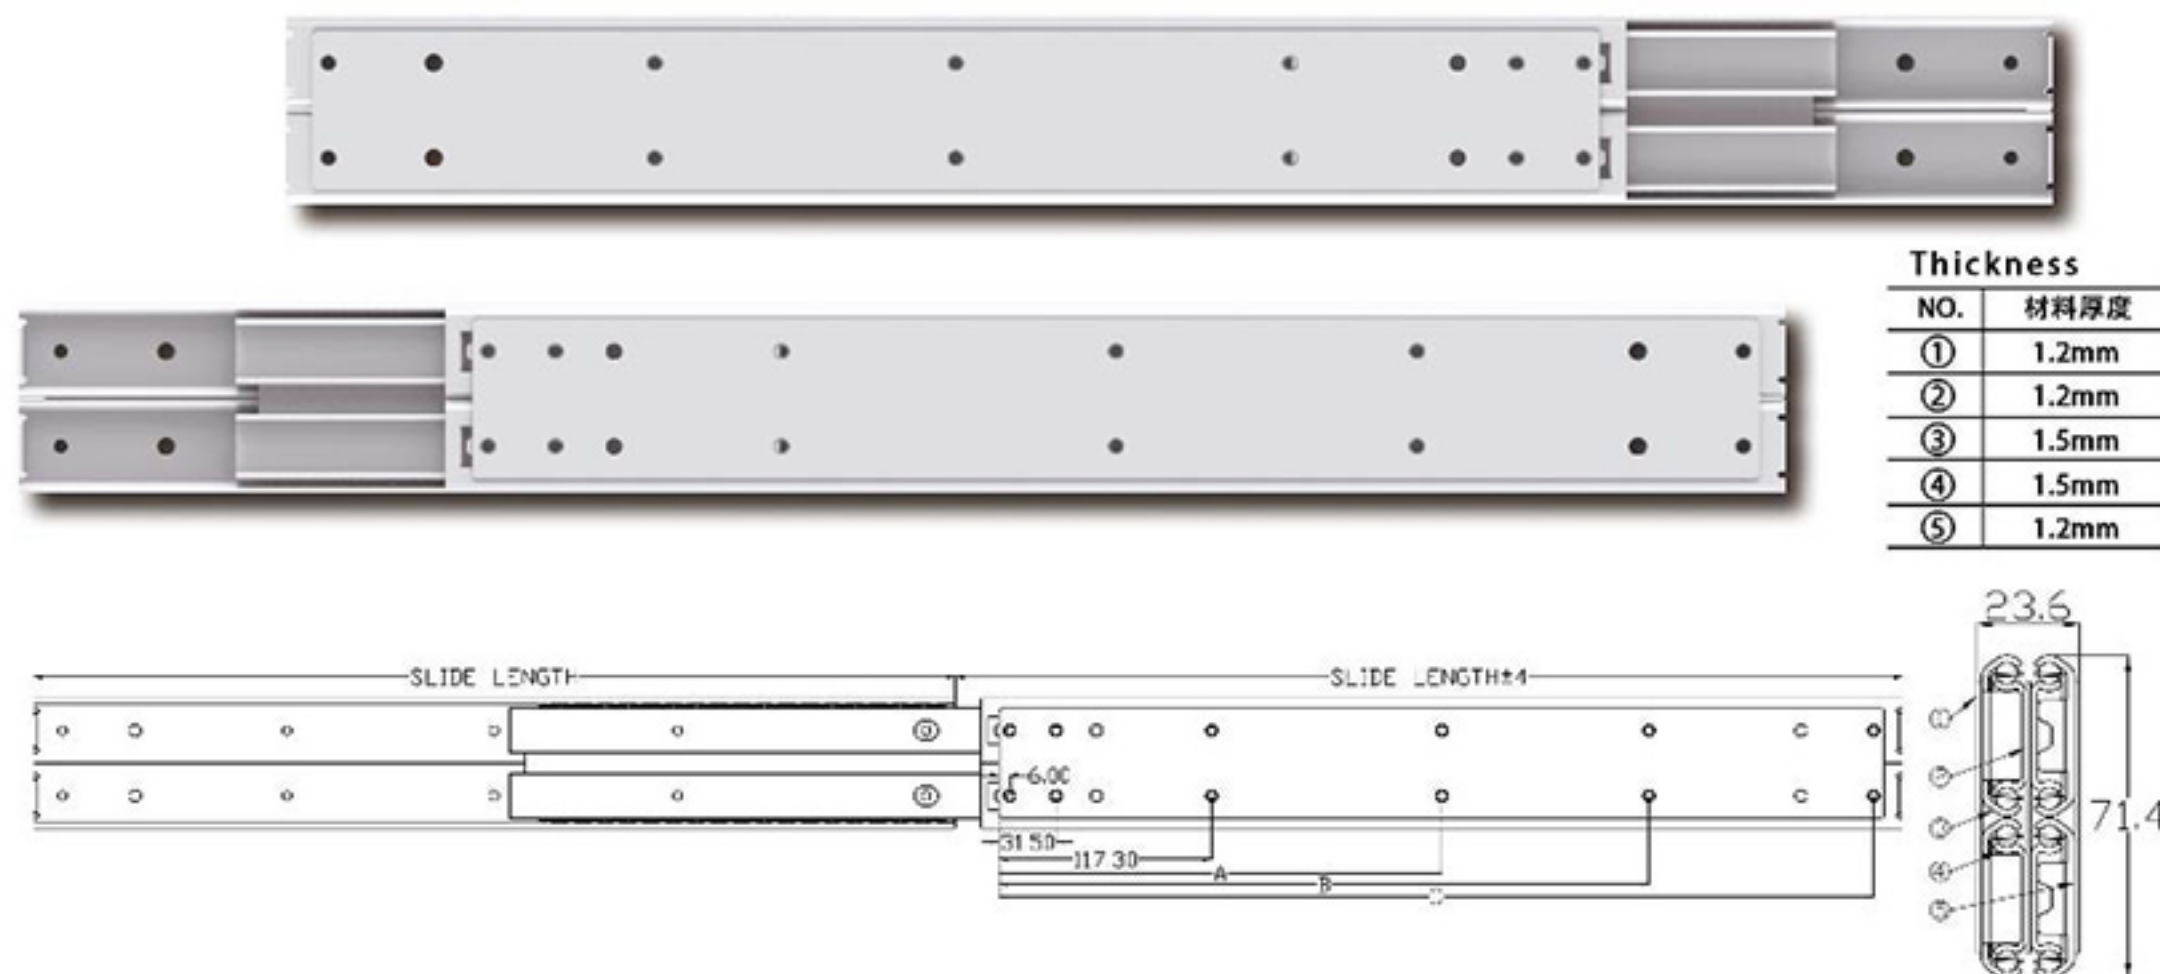

NO.	材料厚度
①	1.2mm
②	1.2mm
③	1.5mm
④	1.5mm
⑤	1.2mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	Weight Capacity lbs/kg	Weight g/set	Carton set
12"	304.8	318.8		155.2	279	488/222	3000	6
14"	355.6	369.6		206	329.8	477/217	3500	6
16"	381	420.4		256.8	380.6	466/212	4000	6
18"	457.2	471.2	218.7	307.6	431.4	455/207	4500	6
20"	508	522	244.1	358.4	482.2	444/202	5000	4
22"	558.8	572.8	269.5	409.2	533	433/197	5500	4
24"	609.6	623.6	294.9	460	583.8	422/192	6000	4
26"	660.4	674.4	320.3	510.8	634.6	411/187	6500	4
28"	711.2	725.2	345.7	561.6	685.4	400/182	7000	4


- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 采用32mm系列孔位, 关闭防止滑出功能, 有可分离和不可分离设计。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**400磅/182kgs (28" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。

- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full exetension
- **Features:**100% Exetension, with 32mm hole system, mechanism to prevent the drawer pops out, separable and inseparable are available.
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**400lbs/182kgs(for 28")
- **Material:**cold-rolled steel, stainless steel



QQ-7102A 三节精密静音滚珠重型滑轨

3-Fold Precise & silent heavy duty ball bearing slide

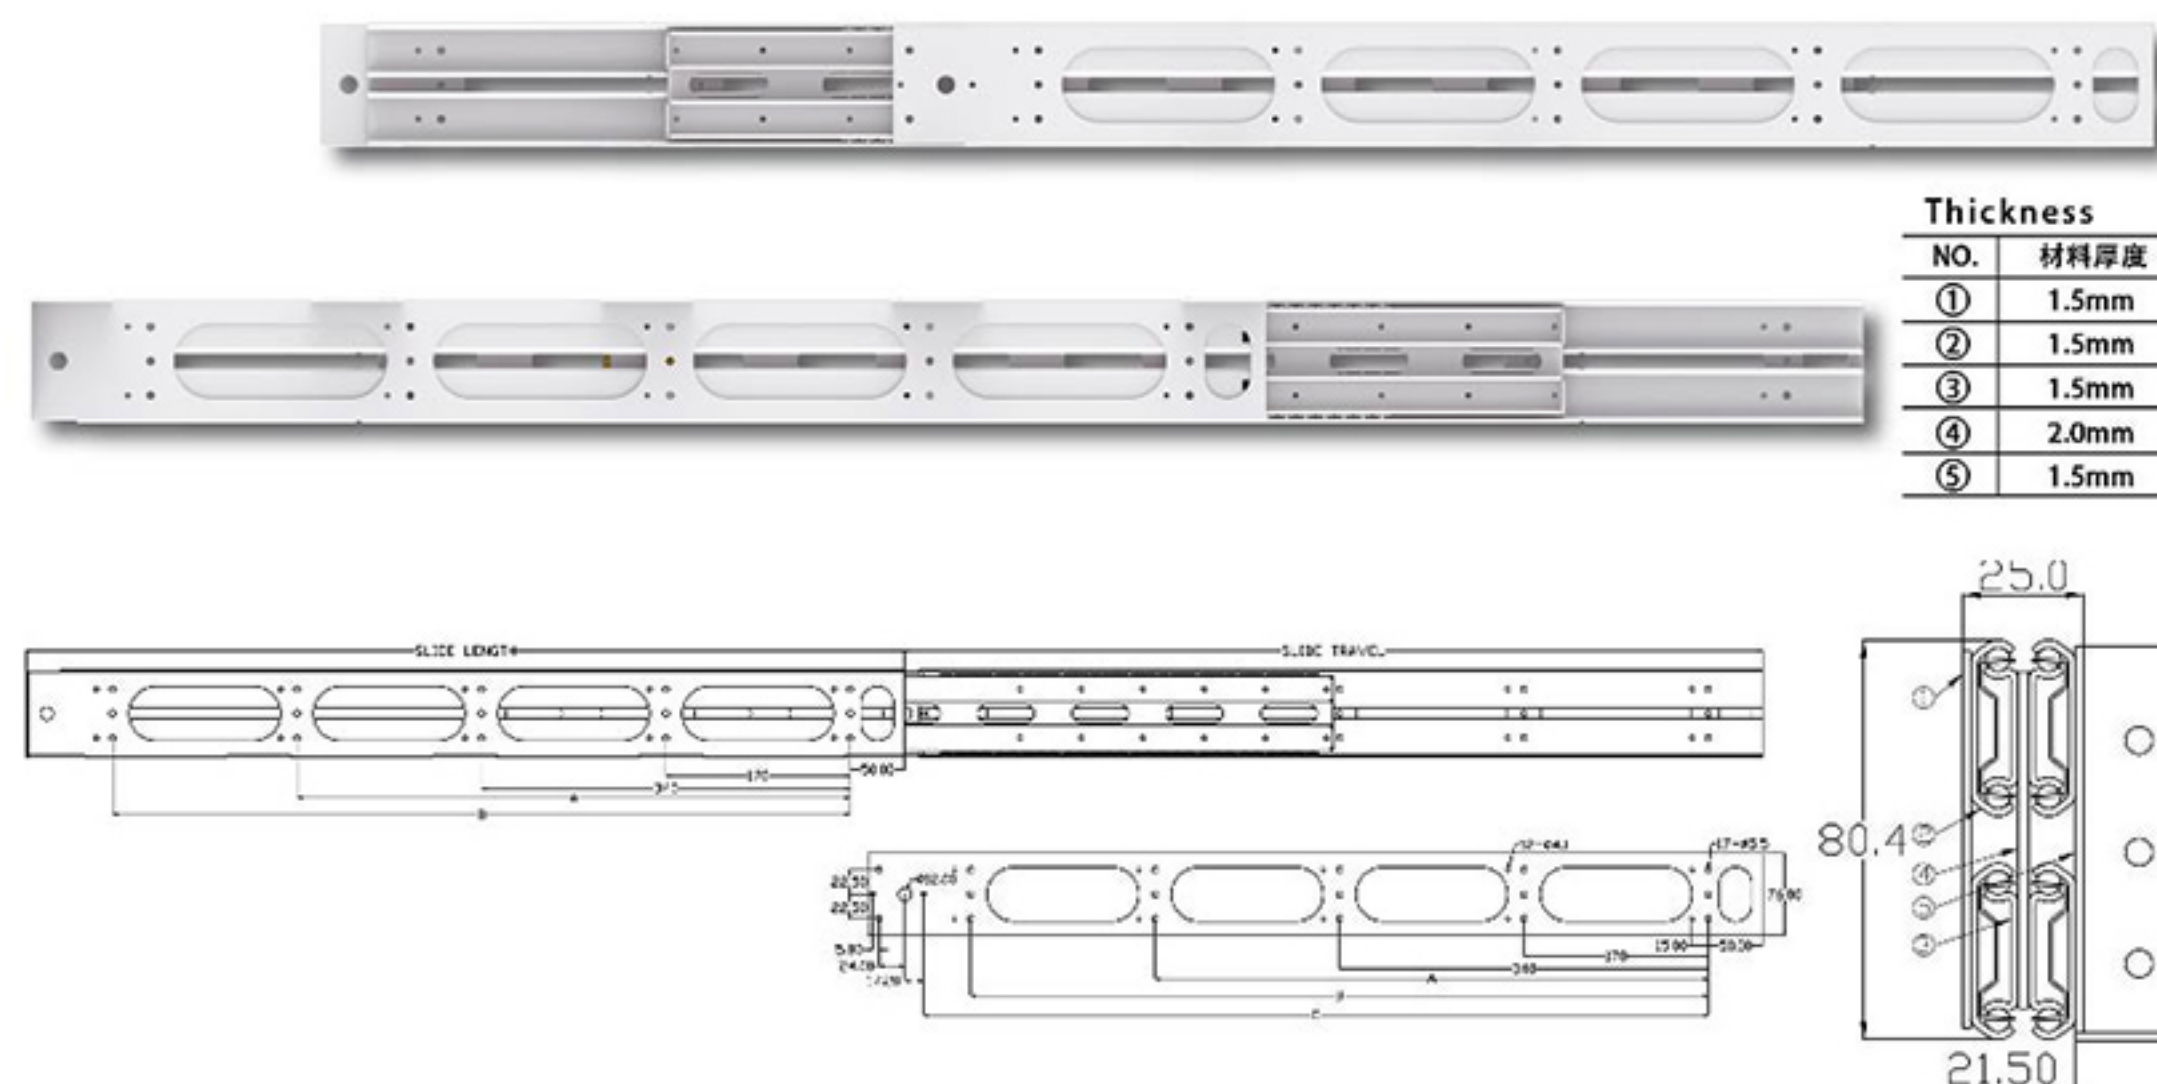

NO.	材料厚度
①	1.5mm
②	1.5mm
③	1.5mm
④	2.0mm
⑤	1.5mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	Weight Capacity lbs/kg	Weight g/set	Carton set
18"	450	458			348	275/125	4527	4
20"	500	508			398	264/120	5030	4
24"	600	604			498	242/110	6036	4
28"	700	705	510		598.3	220/100	7042	3
33"	825	791	510	680	723.3	192/87	8300	3

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, , 有可分离和不可分离设计。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**220磅/100kgs (28" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。

- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full exetension
- **Features:**100% Exetension, mechanism to prevent the drawer pops out, separable and inseparable are available.
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**220lbs/100kgs(for 28")
- **Material:**cold-rolled steel, stainless steel



永康市兴源工贸有限公司
XINGYUAN
Industrial & Trading Co., Ltd.

精密滚珠滑轨制造企业、真正的滑轨制造专家
Real Expert and Manufacturer for Precise Ball Bearing Slide
承载 (weight capacity):220lbs/100kgs-22"滑轨。



55系列 三节精密滚珠滑轨


3-FOLD PRECISE & SILENT HEAVY DUTY BALL BEARING SLIDE

Http: //www.xingyuancn.com E-mail:ykxingyuan@163.net

永康市兴源工贸有限公司
XINGYUAN
Industrial & Trading Co., Ltd.



QQ-5501A 三节精密静音滚珠重型滑轨 3-Fold Precise & silent heavy duty ball bearing slide

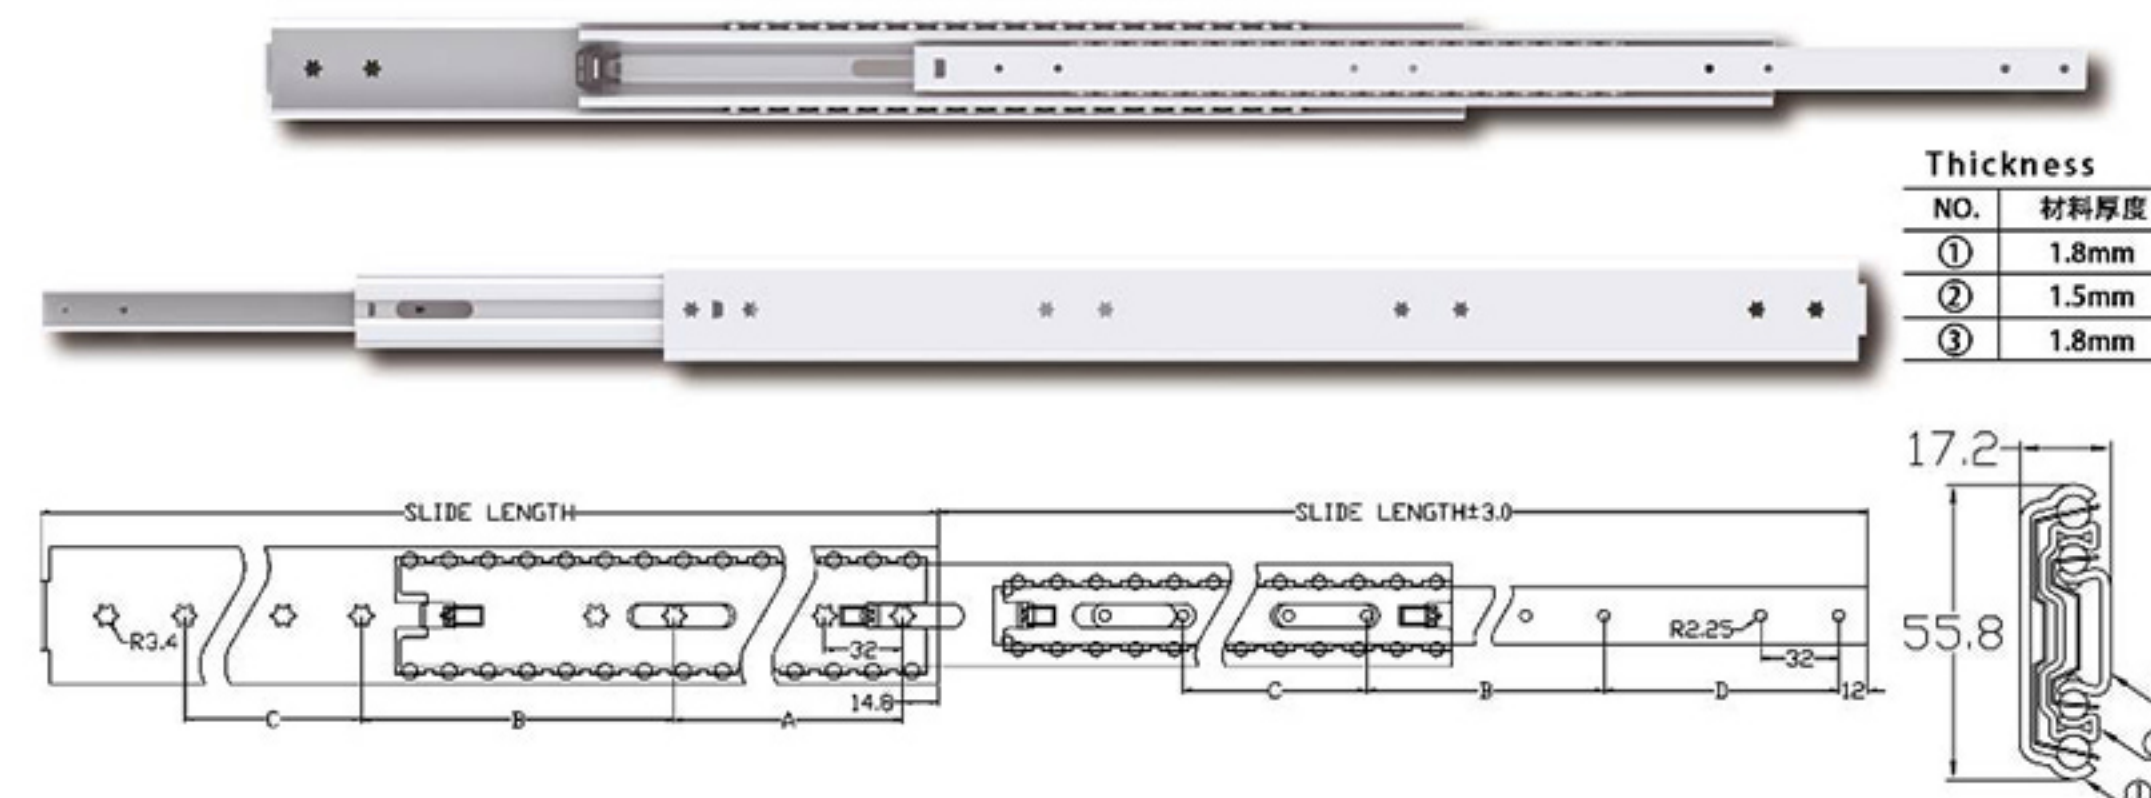


Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	C mm	D mm	Weight Capacity lbs/kg	Weight g/set	Carton set
12"	300	306	128	96		96	275/125	1704	10
14"	350	356	160	128		128	264/120	1988	10
16"	400	406	160	160		128	253/115	2272	10
18"	450	456	192	192		160	242/110	2556	10
20"	500	506	224	192		160	231/105	2840	8
22"	550	556	256	224		224	220/100	3124	8
24"	600	606	160	160	192	160	209/95	3408	8
26"	650	656	192	192	192	160	198/90	3692	8
28"	700	706	192	224	192	192	187/85	3976	6
30"	750	756	224	224	224	192	176/80	4260	6
32"	800	806	256	224	256	224	165/75	4544	6

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 采用32mm系列孔位, 关闭防止滑出功能, 有可分离和不可分离设计。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**220磅/100kgs (22" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full exetension
- **Features:**100% Exetension, with 32mm hole system, mechanism to prevent the drawer pops out, separable and inseparable are available.
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**220lbs/100kgs(for 22")
- **Material:**cold-rolled steel, stainless steel



QQ-5502A 三节精密静音挂插滚珠重型滑轨

3-Fold Precise & silent bayonet mount heavy duty ball bearing slide

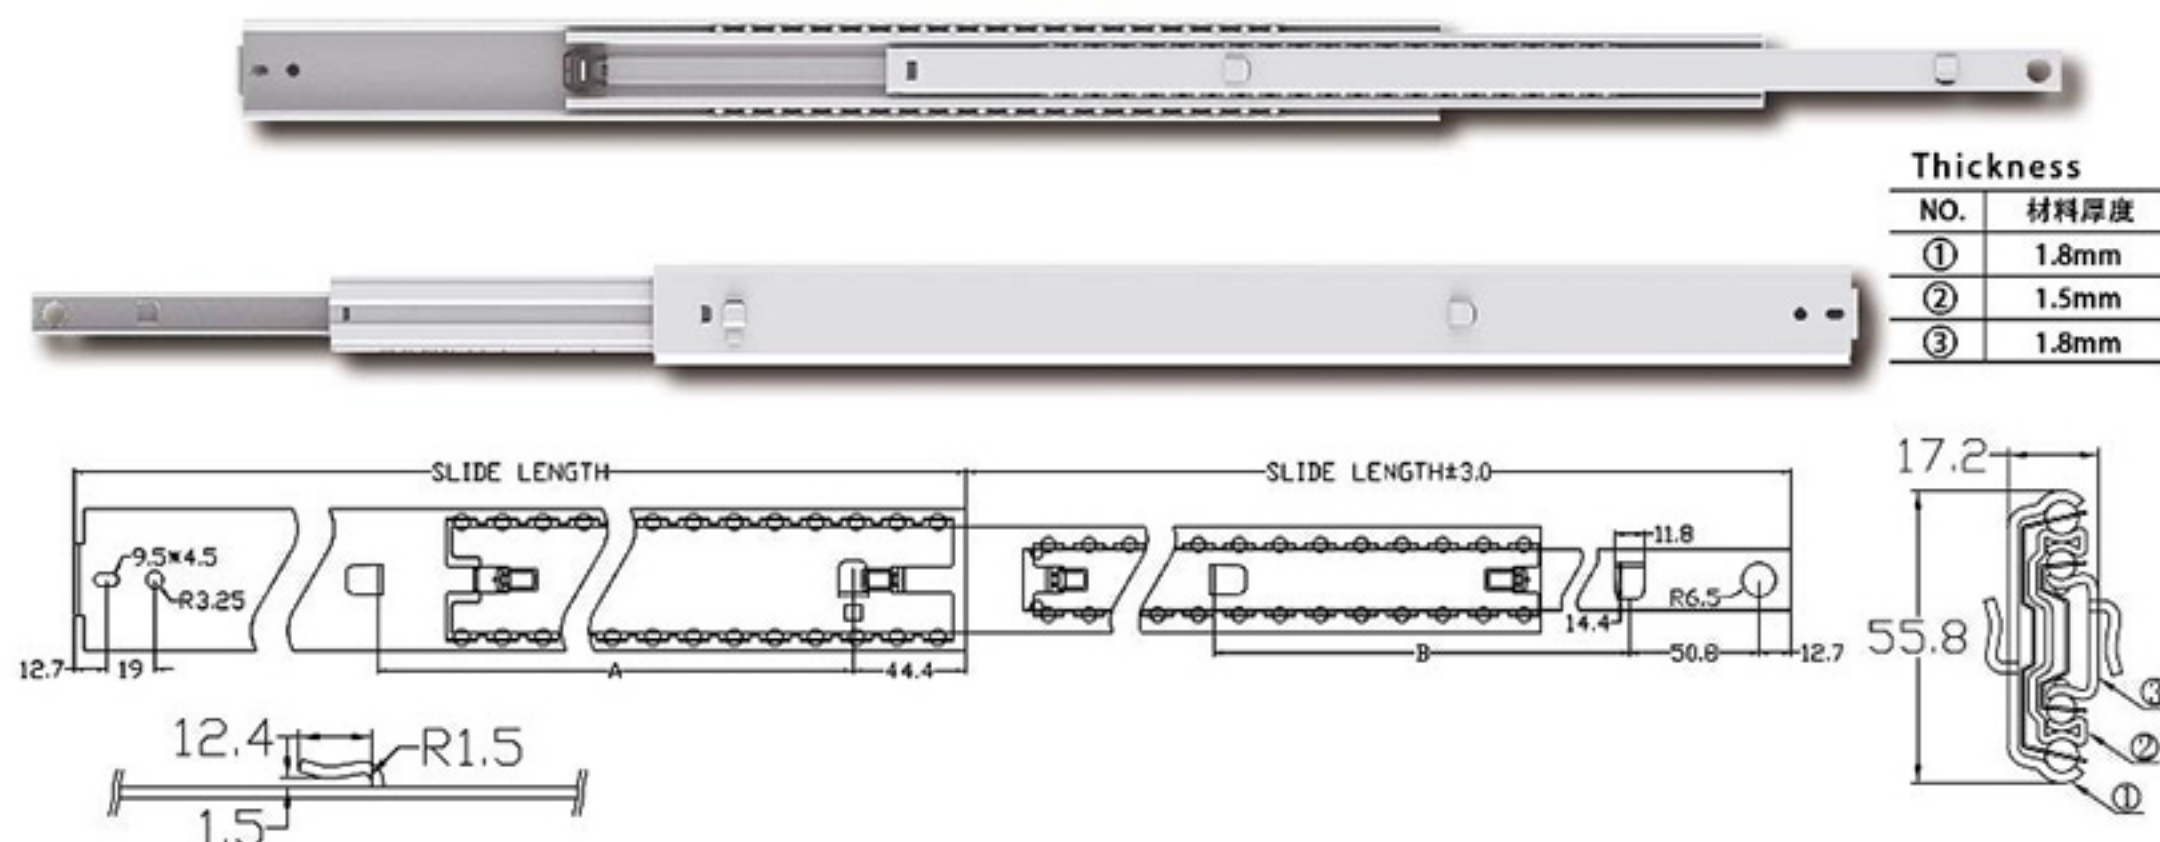

Thickness	
NO.	材料厚度
①	1.8mm
②	1.5mm
③	1.8mm


Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	Weight Capacity lbs/kg	Weight g/set	Carton set
10"	254	260	139.7	139.7	286/130	1420	10
12"	304.8	310.8	190.5	152.4	275/125	1704	10
14"	355.6	361.6	241.3	203.2	264/120	1988	10
16"	406.4	412.4	317.5	254	253/115	2272	10
18"	457.2	463.2	317.5	266.7	242/110	2556	8
20"	508	514	393.7	266.7	231/105	2840	8
22"	558.8	564.8	393.7	317.5	220/100	3124	8
24"	609.6	615.6	393.7	317.5	209/95	3408	8
26"	660.4	666.4	393.7	393.7	198/90	3692	6
28"	711.2	717.2	393.7	393.7	187/85	3976	6
30"	762	768	469.9	444.5	176/80	4260	6

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 简便的挂插式安装, 不可分离, 防止抽屉弹出机构。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**220磅/100kgs (22" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full extension
- **Features:**100% Exetension, bayonet mounting-easy and quick installation and removal, inseparable, mechanism to prevent the drawer pops put
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**220lbs/100kgs(for 22")
- **Material:**cold-rolled steel, stainless steel



QQ-5503A 三节精密静音挂插滚珠重型滑轨

3-Fold Precise & silent bayonet mount heavy duty ball bearing slide

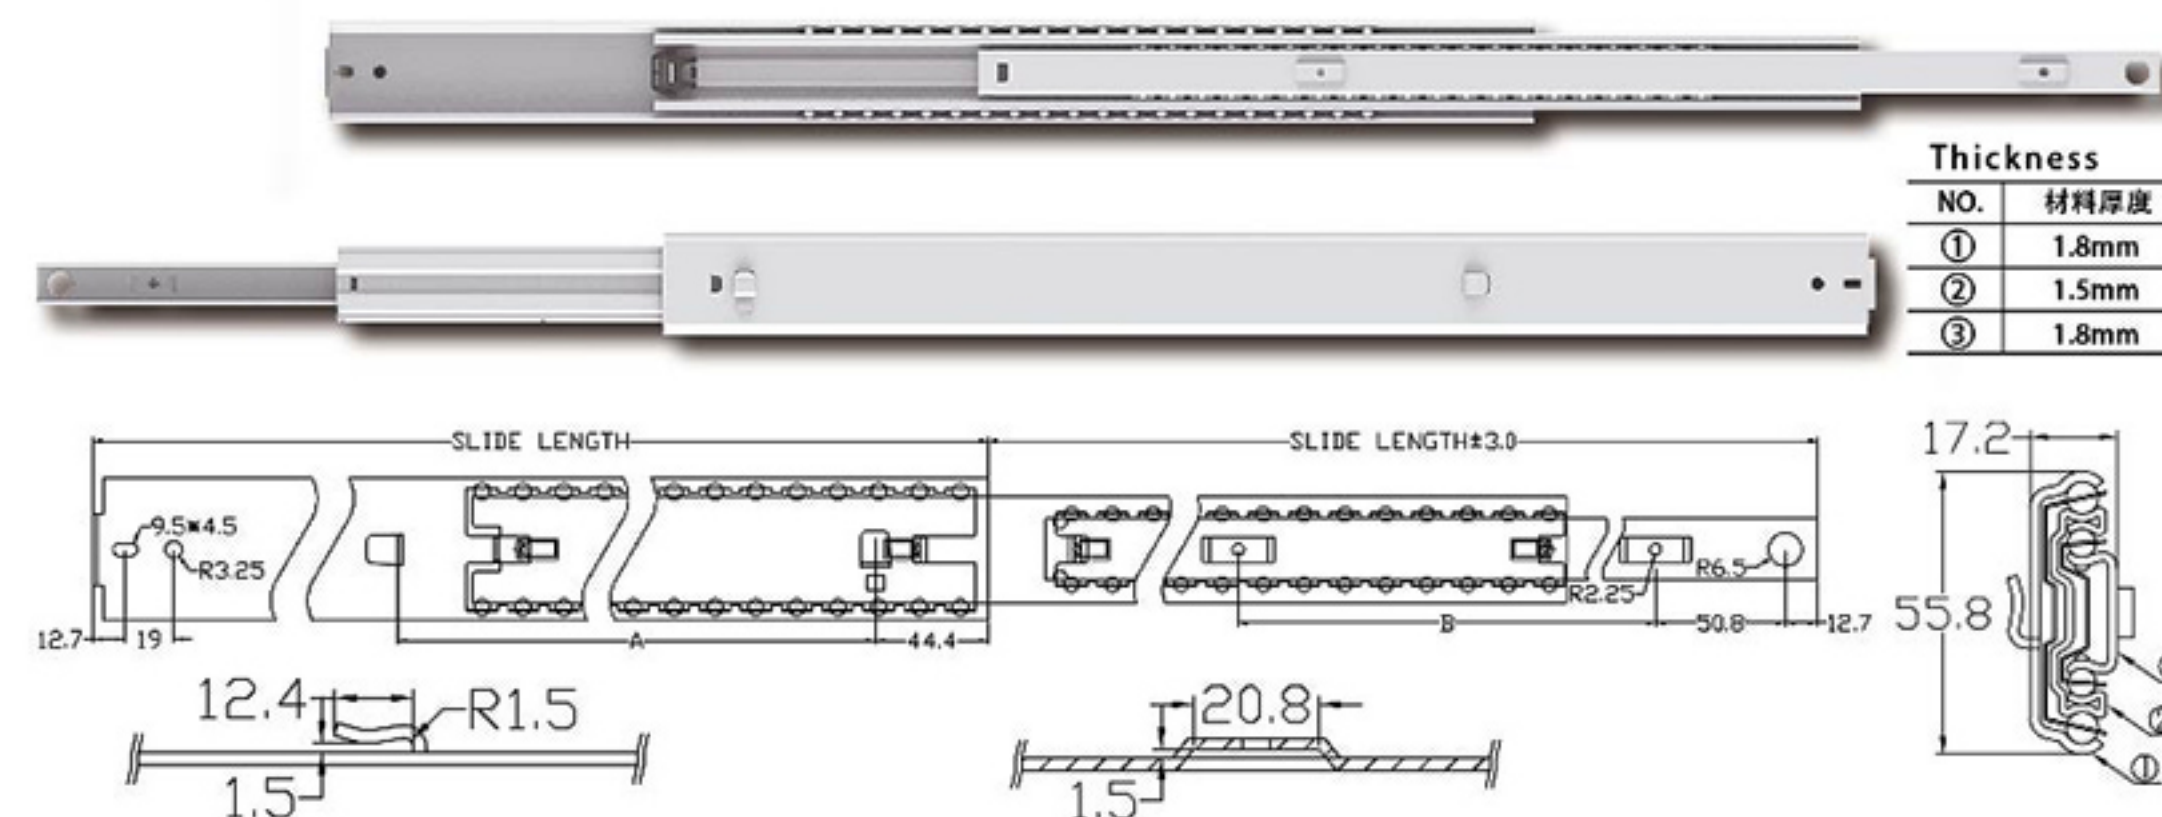

Thickness	
NO.	材料厚度
①	1.8mm
②	1.5mm
③	1.8mm

Size inch	Slide Length mm	Slide Travel mm	A mm	B mm	Weight Capacity lbs/kg	Weight g/set	Carton set
10"	254	260	139.7	139.7	286/130	1420	10
12"	304.8	310.8	190.5	152.4	275/125	1704	10
14"	355.6	361.6	241.3	203.2	264/120	1988	10
16"	406.4	412.4	317.5	254	253/115	2272	10
18"	457.2	463.2	317.5	266.7	242/110	2556	8
20"	508	514	393.7	266.7	231/105	2840	8
22"	558.8	564.8	393.7	317.5	220/100	3124	8
24"	609.6	615.6	393.7	317.5	209/95	3408	8
26"	660.4	666.4	393.7	393.7	198/90	3692	6
28"	711.2	717.2	393.7	393.7	187/85	3976	6
30"	762	768	469.9	444.5	176/80	4260	6

- **建议用途:**高承载的活动柜, 工业用柜, 食品柜, 货柜, 自动售货机, 自动取款机, 消防车, 救护车, 多用途运载车, 仓储设备, 机柜等要求全展开的用途。
- **产品特点:**100%完全拉出, 简便的挂插式安装, 不可分离, 防止抽屉弹出机构。
- **表面处理:**镀蓝白锌, 黑色电泳, 三价铬环保镀锌。
- **承载重量:**220磅/100kgs (22" 滑轨)
- **材料选择:**冷轧钢, 不锈钢。
- **Suggested Applications:**high-load movable cabinet, industrial cabinet, food locker, shelves, vending machine, ATM, fire engine, ambulance, utility vehicle, storage equipment, sever cabinet or any applications requiring full extension
- **Features:**100% Exetension, bayonet mounting-easy and quick installation and removal, inseparable, mechanism to prevent the drawer pops out
- **Finish:**blue-white zinc plating, black electrophoresis, environmental zinc plating with trivalent chromium
- **Weight Capacity:**220lbs/100kgs(for 22")
- **Material:**cold-rolled steel, stainless steel